



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C23C 14/00	A1	(11) International Publication Number: WO 97/07257 (43) International Publication Date: 27 February 1997 (27.02.97)
<p>(21) International Application Number: PCT/GB96/01966</p> <p>(22) International Filing Date: 12 August 1996 (12.08.96)</p> <p>(30) Priority Data: 9516927.2 18 August 1995 (18.08.95) GB</p> <p>(71) Applicant (for all designated States except US): THE SECRETARY OF STATE FOR DEFENCE [GB/GB]; Defense Research Agency, Farnborough, Hampshire GU14 6TD (GB).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): WARD-CLOSE, Charles, Malcolm [GB/GB]; Defense Research Agency, Farnborough, Hampshire GU14 6TD (GB). DUNFORD, David, Victor [GB/GB]; Defense Research Agency, Farnborough, Hampshire GU14 6TD (GB).</p> <p>(74) Agent: SKELTON, Stephen, Richard; D/IPR (DERA) Formalities, Poplar 2, MOD (PE) Abbey Wood # 19, P.O. Box 703, Bristol BS12 7DU (GB).</p>		<p>(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report.</i></p>
<p>(54) Title: PREPARATION OF STRUCTURAL MATERIALS BY PHYSICAL VAPOUR DEPOSITION PROCESS</p> <p>(57) Abstract</p> <p>A process is disclosed for the preparation of bulk structural materials by physical vapour deposition, which process comprises the steps of: (a) depositing onto a temperature-controlled collector discrete layers of at least two materials of a predetermined known sequence, the layers being of predetermined relative thicknesses; (b) removing the deposited layered material obtained in step (a) from the collector, and (c) heating the layered material to a predetermined temperature effective to produce a compound, the composition of which is determined by the relative proportions of the materials deposited in step (a). Preferably, the deposited materials are metallic elements which are deposited in layers of thickness in the range from 5 Å to 50 nm. Optionally, barrier layers are interposed at intervals during the deposition step (a) for the purpose of preventing diffusion across the bulk deposit during the heat treatment step (c).</p> <div data-bbox="730 1134 1429 1890"> <p>The diagram illustrates a physical vapour deposition setup. At the top, a large, stepped collector (labeled 50) is shown. Below it, three sources (labeled 10, 30, and 20) are positioned to emit vapour, indicated by dashed lines, towards the collector. Source 10 is on the left, source 30 is in the center, and source 20 is on the right. A central support structure (labeled 40) is also visible, supporting the central source 30.</p> </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UC	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

PREPARATION OF STRUCTURAL MATERIALS BY PHYSICAL VAPOUR DEPOSITION PROCESS

The present invention relates to structural materials and, in particular, to a process for the preparation of structural materials having a controlled microstructure and composition. The process uses the technique of physical vapour deposition onto a temperature-controlled collector for a sufficiently long period and at a sufficiently high vapour flux to deposit a bulk material of 0.5mm thickness or greater.

Methods and apparatus for the production of bulk alloys by physical vapour deposition have been described previously in British Patent Nos. 1 206 586 and 1 265 965. In the first of these patents, the basic principles were established for deposition of bulk alloys from the vapour phase, whereby the operation is carried out under vacuum inside a vacuum chamber and the alloy constituents are evaporated from one or more evaporation baths before being caused to condense on a temperature-controlled collector. In the second patent, an improved process is described in which inhomogeneity in the deposited alloy is minimised by moving the collector relative to the evaporation sources. Also, this patent addresses the problem of columnar growth in the deposit by proposing deposition of alternate layers of a first metal with thin layers of a second metal. In this way, each metal must nucleate and begin growth afresh with the deposition of successive layers. By suitable control of the process variables, it is possible to eliminate columnar growth.

In British Patent No. 2 264 952 B, an apparatus and method are disclosed for the preparation of alloys, the constituent metals of which have widely disparate vapour pressures, such as magnesium/transition metal element alloys.

There is continuing interest in the preparation of new materials using rapid solidification rate (hereafter referred to as RSR) production processes. Rapid solidification techniques including physical vapour deposition provide the means to overcome equilibrium thermodynamic constraints and to achieve compositions which are beyond the scope of conventional ingot metallurgy. This is achieved by effectively "freezing" constituent atoms in position before they have the opportunity

to migrate and segregate as they would in conventional ingot processes. RSR techniques therefore offer a possible route to materials which cannot be obtained by other methods.

In the preparation of alloys as described above, physical vapour deposition is preferred over other forms of RSR processing for a number of reasons. Firstly, the cooling rate is much higher in physical vapour deposition and therefore the likelihood of formation of solid solutions is increased.

Secondly, physical vapour deposition offers a considerable choice of potential constituents since the candidate elements or compounds are raised to the vapour phase, in which state miscibility is ensured. By contrast, other forms of RSR processing are limited in the possible combinations of constituents to those substances which are miscible in the molten state. This is a particularly important consideration in instances where one of the constituents has a very much higher vapour pressure than the other constituent or constituents of the proposed material.

It is an object of the present invention to provide a structural material in which the composition and microstructure are precisely controlled. The advantages of achieving the degree of control which the present invention attains are that structural materials can be designed with enhanced mechanical properties, particularly increased fracture resistance and toughness.

It is a further object of the invention to provide a structural material having a refined grain size distribution which enables superplastic forming to be carried out at reduced temperatures compared to materials prepared by conventional ingot processes. Thus, materials prepared according to the present invention are particularly suited to the production of near net shape structures and provide the opportunity, during subsequent heat treatment, to develop the required microstructure in formed products for enhanced creep resistance and/or fracture toughness.

The invention is a process for producing a structural material having a controlled composition and microstructure, the process comprising the steps of:

(a) using a physical vapour deposition technique to deposit onto a temperature-controlled collector discrete layers of at least two materials in a known sequence, the layers being of predetermined relative thicknesses;

(b) removing the deposited layered material obtained in step (a) from the collector, and

(c) heating the layered material to a predetermined temperature effective to produce a compound, the composition of which is determined by the relative proportions of the materials deposited in step (a).

The present invention is distinguished from the process described in British Patent No. 2 249 965 B in that simultaneous deposition of more than one material does not occur. Further, it is distinguished from the processes described in British Patents No. 1 265 965 and 1 206 586 in that it requires deposition of alternating thin layers of materials in a known sequence, not for the purpose of controlling nucleation in the bulk material, but to enable subsequent combination between the different materials in a later step in the process.

Preferably, the materials which are physically vapour deposited in the process of the present invention are metallic elements, so that the heat treatment step (c) is effective to produce an intermetallic compound of predetermined composition. The composition of this intermetallic compound can be controlled by varying the relative thicknesses of the deposited layers up to a maximum of about 150nm. This is also influential upon the microstructure for reasons which are explained in more detail below.

Alternatively, one of the vapour deposited materials may be a ceramic. In yet another form of the invention, the deposited materials may both be compounds such as oxides or nitrides to give a complex end product such as a mixed oxynitride.

Physical vapour deposition is a "line-of-sight" technique and therefore the thickness of respective layers of deposited materials is dependent on the dwell

time of the collector in the respective vapour flux. In order to achieve the desired laminar precursor material in step (a), it is therefore necessary to expose the collector selectively to the respective vapour streams. This may be achieved by controlled shuttering of the collector or by moving the collector relative to the evaporation sources. Most conveniently, a rotating collector is used.

It is also possible to vary the rate of deposition of individual constituents by controlling the energy input to the respective evaporation sources.

One of the ways in which the microstructure of the bulk material can be controlled is to interpose barrier layers at intervals during the deposition step for the purpose of preventing diffusion across the bulk deposit during the heat treatment step. In a two-component system, for example, the provision of a barrier layer between adjacent bilayer pairs means that diffusion distances are short. In any event, diffusion is very rapid during the heat treatment step because of the high number of grain boundaries resulting from deposition on an atomic scale. Barrier layers aid suppression of grain enlargement by prevention of grain growth in one dimension, i.e. along the deposition axis.

Thus, the as-deposited microstructures can be preserved. Barrier layers of oxides such as yttria (Y_2O_3) are particularly well suited for this purpose and may be deposited using physical vapour deposition techniques or other suitable methods such as molecular beam epitaxy (MBE) or sputtering.

Typically, the thicknesses of deposited layers range from 5 Å to 50 nm. Preferably, the layers range in thickness from 1 nm to 40 nm, most preferably from 2.5 nm to 20 nm.

As indicated above, by using layer thicknesses in the nanoscale range, grain sizes are maintained at a minimum. This means that there is a high number of grain boundaries in any given deposited layer and diffusion during the subsequent heat treatment step is very rapid. In addition, the favourable circumstances for diffusion mean that it can be carried out in the solid state at a temperature very much lower than the melt temperatures of the constituent starting materials or of the compound which they form.

The invention will now be described by way of example only with reference to the single figure which is a schematic representation of a multi-source vapour

deposition apparatus.

In Figure 1, a vapour deposition laminating facility is shown which, in use, is enclosed in a high vacuum system (10⁻⁷ mbar). Vacuum pumping is provided by a cryogenic pump (high vacuum) and rotary pump.

The evaporation station comprises a pair of 14 kw electron beam guns 10, 20 and a pair of thermal evaporation sources 30,40 (only one shown) which are positioned beneath a rotatable aluminium collector 50. The rotatable collector 50 is water cooled, but control of deposition microstructure and adhesion of the deposit to the collector surface is provided by heating the collector surface with 8 kw lamps (not shown). Accurate control of deposited layer thicknesses is achieved by rotating the collector at speeds from 0.01 to 4,000 revolutions per minute and by controlling the power to the evaporation sources. Uniform speed control of the rotatable collector 50 may be achieved using a proportional controller and a gear box, especially for low speeds. Visual observation of the evaporation and deposition steps may be provided by means of viewing ports positioned around the vacuum chamber.

Prior to commencement of deposition, the receiving surface of the rotatable collector 50 is prepared by shot blasting to give a roughen surface. Alternatively, the roughen surface can be obtained by plastic media blasting or, if desired, a smooth surface can be obtained by polishing to a diamond finish.

Initially, the evaporation sources are controlled to give an initial thick layer of aluminium deposit to provide a key for subsequent laminated layers.

Subsequently, alternating layers of titanium and aluminium having thicknesses of 1 - 2 nm are deposited onto the collector 50 which is held at a mean temperature of 300°C. After a period of about 2 hours, a thin sheet approximately 0.5 mm is deposited.

After release of the vacuum and dismantling of the evaporation apparatus, the deposited laminate is removed from the collector. If necessary, the deposited laminate can be machined from the collector.

Subsequent thermal treatment at temperatures in the range of 400 - 600°C of samples prepared using the above procedure produced complete titanium aluminides and resulted in total removal of the layered structure. By tailoring the

layer thickness of each constituent, it is possible to control the composition of the intermetallic compound. For example, 5 nm aluminium layers alternated with 15 nm titanium layers gave a T_3Al compound whilst equal thickness layers of 5 nm aluminium and 5 nm titanium gave the $TiAl$ compound.

As mentioned above, it is possible to control the actual thickness of the developed intermetallic by incorporating intermediate barrier layers such as yttria.

Although the process of the present invention has been described above with reference to titanium aluminides, other intermetallic systems such as Fe/Al , Ni/Al and Mo/Si may be produced in process by this method. Other systems will suggest themselves to persons skilled in the art.

Also, it should be recognised that the process according to the present invention is not limited to metal/metal systems but may be extended to include metal/ceramic systems and other combinations of structural materials.

CLAIMS

1. A process for producing a structural material having a controlled composition and microstructure, the process comprising the steps of:
 - (a) using a physical vapour deposition technique to deposit onto a temperature-controlled collector discrete layers of at least two materials in a known sequence, the layers being of predetermined relative thicknesses of up to 150nm;
 - (b) removing the deposited layered material obtained in step (a) from the collector, and
 - (c) heating the layered material to a predetermined temperature effective to produce a compound, the composition of which is determined by the relative proportions of the materials deposited in step (a).
2. A process as claimed in claim 1 wherein the materials which are physically vapour deposited in step (a) are metallic elements.
3. A process as claimed in claim 1 wherein at least one of the materials physically vapour deposited in step (a) is a ceramic.
4. A process as claimed in any preceding claim wherein the deposition is carried out onto a rotating collector.
5. A process as claimed in any preceding claim wherein barrier layers are interposed at intervals during the deposition step (a) for the purpose of preventing diffusion across the bulk deposit during the heat treatment step (c).
6. A process as claimed in any preceding claim wherein the thicknesses of deposited layers range from 5 Å to 50 nm.


7. A process as claimed in claim 6 wherein the thicknesses of deposited layers range from 1 nm to 40 nm.

8. A process as claimed in claim 7 wherein the thicknesses of deposited layers range from 2.5 nm to 20 nm.

9. A process as claimed in any preceding claim wherein the heat treatment step (c) includes a solid state diffusion step.

10. A process for producing a structural material having a controlled composition and microstructure substantially as described herein and with reference to the drawings.

1/1

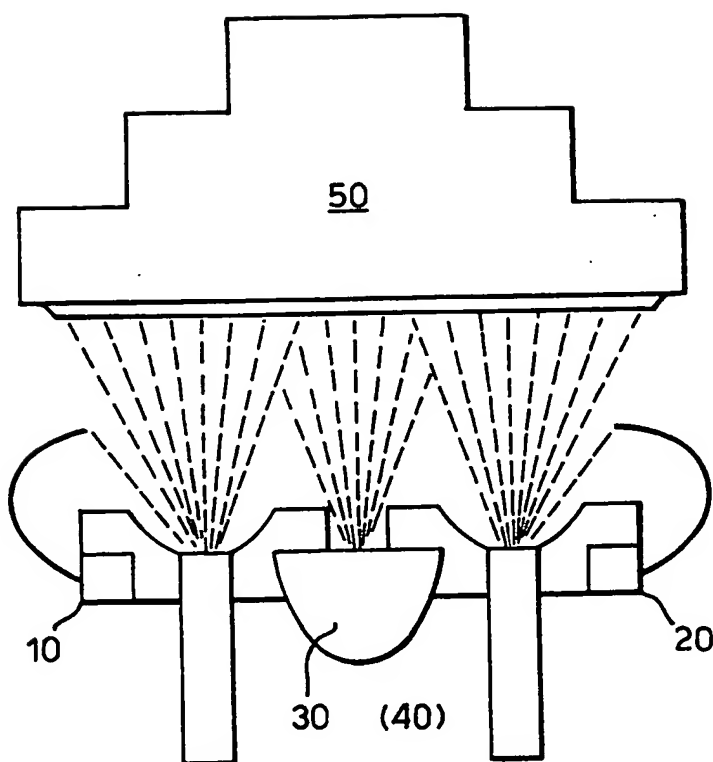

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 96/01966

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 C23C14/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 C23C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	METALLURGICAL AND MATERIALS TRANSACTIONS B: PROCESS METALLURGY AND MATERIALS PROCESSING SCIENCE, vol. 26-B, no. 3, 1 June 1995, pages 603-610, XP000512535 DYER T S ET AL: "THE SYNTHESIS OF NICKEL ALUMINIDES BY MULTILAYER SELF-PROPAGATING COMBUSTION" *EXPERIMENTAL MATERIALS AND METHODS*	1,2,4
A	JAPANESE JOURNAL OF APPLIED PHYSICS, PART 2 (LETTERS), AUG. 1988, JAPAN, vol. 27, no. 8, ISSN 0021-4922, pages L1530-L1532, XP002018842 KOBAYASHI T ET AL: "Improvement in soft magnetic properties of heat-treated Fe-C/Ni-Fe multilayers" see the whole document --- -/--	1-10

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

19 November 1996

Date of mailing of the international search report

04.12.1996

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Ekhult, H

INTERNATIONAL SEARCH REPORT

Intern al Application No
PCT/GB 96/01966

C(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>GB,A,1 206 586 (THE MINISTER OF TECHNOLOGY) 23 September 1970 cited in the application see claims 1,2</p> <p>-----</p>	1-10

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/GB 96/01966

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A-1206586	23-09-70	AT-A- 293033	15-08-71
		DE-A- 1608243	03-12-70
		US-A- 3554739	12-01-71
